

MG3690B

RF/Microwave Signal Generators, 0.1 Hz to 70 GHz/325 GHz




MG3690B Family Signal Generators

Easy to Read

backlit 1/4 VGA LCD
display presents instrument
status and measurement
setup menus.

Function Keys

group instrument functions for simple operation.
Configure GPIB interface and input/output
connectors. Initiate security mode and self-test
diagnostics. Save and recall up to 10 front panel
instrument states.

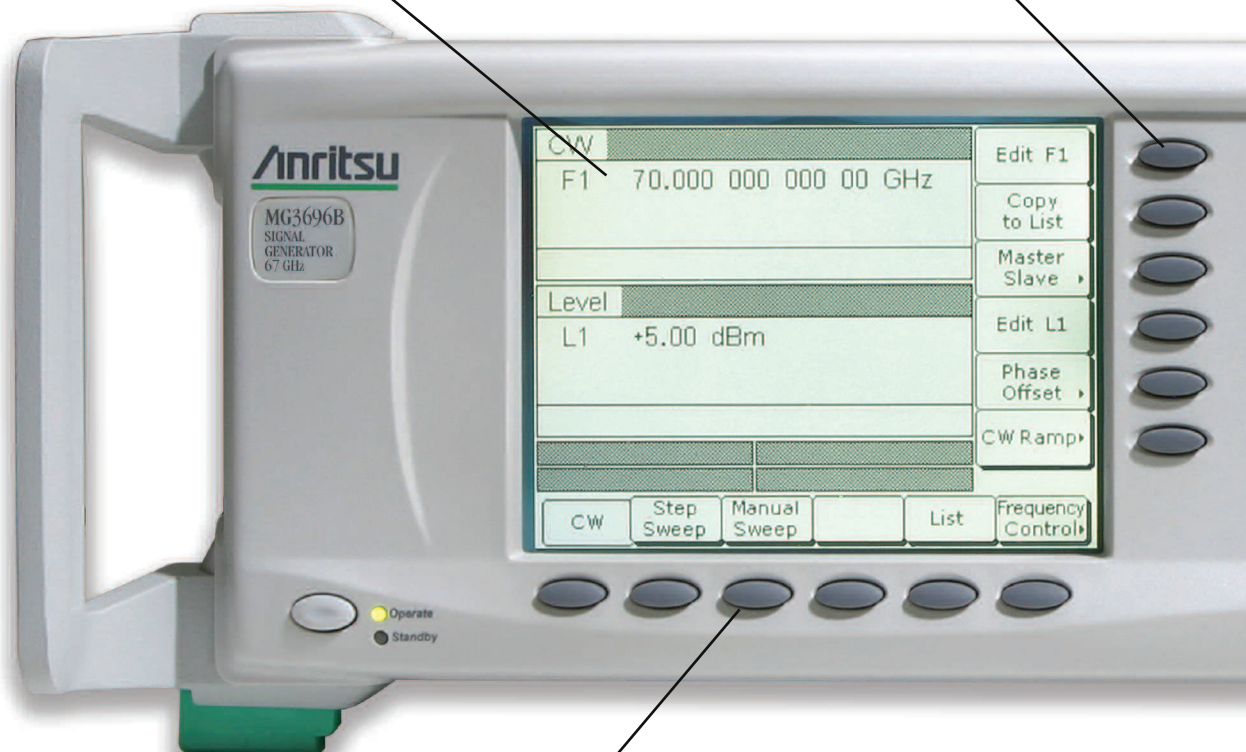

Softkey Menus

lead you quickly to the desired
instrument setup. Intuitive menu flow
virtually eliminates opening the
operating manual! (Open it anyway,
there's other good information in it.)

Conveniently Enter and Edit Parameters

with the numeric keypad, cursor/increment-decrement key, or rotary data knob.

A Low Profile 13.3 cm Height

coupled with 45 cm depth, gives you maximum performance in the minimum A.T.E. rack space.



Set Frequency from 0.1 Hz to 70 GHz in .01 Hz Steps.

Set power levels from +30 to -120 dBm in 0.01 dB steps.

Value Without Compromise

Your microwave signal generation requirements have never been tougher, and yet your capital equipment budget



has never been tighter. You need the most value you can get in a synthesizer, but you can't compromise performance.

You need a synthesizer that is configurable to meet today's needs, yet is upgradeable at a reasonable cost to satisfy future requirements without shattering your test equipment budget. Anritsu's MG3690B series of synthesizers deliver the highest performance and the highest value available today.

For extreme requirements, consult with technical and helpful field and factory support engineers for custom solutions.

The MG3690B Synthesized Signal Generator

Basic CW Generators configurable to full-featured Signal Generators.

- Broad Frequency Coverage, in a Single Output: 0.1 Hz to 70 GHz
 - 6 Models, 2 to 10, 20, 30, 40, 50, and 67 GHz (operational to 70 GHz)
 - 10 MHz Coverage Optional (Analog or Digital Down Conversion)
 - 0.1 Hz Coverage Optional
- mmW Coverage up to 325 GHz, in Waveguide
- Ultra-Low SSB Phase Noise Option
 - -110 dBc/Hz (typically) at 1 kHz Offset, 10 GHz Carrier
- Excellent Harmonics and Spurious Response
- Standard output power of +17 dBm at 20 GHz
- High Output Power Option +25 dBm to 10 GHz (+28 dBm typical)
 - +23 dBm to 20 GHz (+26 dBm typical)
 - +19 dBm to 40 GHz (+21 dBm typical)
 - +13 dBm to 50 GHz (+16 dBm typical)
 - +9 dBm to 67 GHz (+11 dBm typical)
- CW and Step Sweep Modes; Analog Sweep Optional
- 5 ms Switching Time (typically) for <100 MHz steps
- 0.01 Hz standard Frequency Resolution
- Phase Offset Capability
- AM, FM/FM Modulations Optional
 - Internal LF Generator Optional
- Pulse Modulation Optional
 - 100 ns Leveled Width, >1 GHz
 - Internal Pulse Generator Optional
- IF Up-Conversion Option, for IQ Modulation Solutions
- Intuitive, Menu-driven Front Panel
- Small and Light
- Proven Reliability with 3 Year Standard Warranty
- Completely Configurable and upgradeable



High Performance Signal Generators

The ultimate in full-function signal generation. They provide comprehensive, high-performance modulation capabilities for signal simulation applications.



- Internal pulse generator with swept delay capability for moving target simulation, including singlet, doublet, triplet, and quadruplet pulses.
- Flexible pulse triggering including free-run, delayed, gated, and composite
- 100 ns Leveled Pulse Width
- Synchronized Pulse with AM/FM/ Φ M for your most complex EW Signal
- 0 to 90% AM, log or linear, over DC to 100 kHz rates
- Four FM modes for up to 10 MHz deviation at 8 MHz rates or 100 MHz deviation at 100 Hz rates
- Phase modulation (Φ M) up to 400 radians deviation at 1 MHz rates
- Internal AM, FM, and Φ M generators, each with 7 modulating waveforms
- Capability to download custom waveforms to internal memory, that can be used for modulating the RF using your custom antenna rotation pattern.

Accurate Solutions for Higher Throughput

Cleaner Phase Noise Means More Accurate Measurements

Anritsu provides this high level of performance so that our customers can develop their own state-of-the-art products. With communications systems and modulation techniques becoming more complex, the low noise aspect of the MG3690B series becomes more important. For example, when the MG3690B is used as a clock source for Bit Error Rate Testing (BERT), the low SSB phase noise translates to precise clocks, with edges that are consistent period after period. The benefit is clear, a wider eye diagram with sharper transitions. The lower the SSB phase noise of the source, the less error the frequency source introduces into the measurement; it's as simple as that.



The MG3690B is the ideal clock source for BERTS, such as the Anritsu MP1632A or MP1763B/MP1764A combo.

One-Box, Ultra-Clean RF and Microwave Signal Solutions


Anritsu's MG3690B series of synthesizers utilize state-of-the-art technology to achieve extremely low phase noise over the full frequency spectrum.

Below 10 MHz, these synthesizers utilize Direct Digital Synthesis (DDS) techniques to achieve ultra-fine frequency resolution coupled with outstanding phase noise performance.

From 10 MHz to 2.2 GHz, a Digital Down Converter (DDC) is available offering ultra-low SSB phase noise performance on a par with the best RF synthesizers on the market and typically 30-50 dB better than other microwave synthesizers. In this frequency range, this stellar SSB phase noise performance is important because the highly congested communications bands require extra clean signals. The DDC produces frequencies by successive binary division, eliminating the addition of non-harmonic spurious common with mixer-based down conversion schemes.


Above 2.2 GHz, Anritsu uses patented techniques that allow us to achieve the best possible phase noise performance. Where other manufacturers typically use only three or four phase locked loops for frequency synthesis, Anritsu adds additional loops optionally to provide the best SSB phase noise on the market today.

Performance Without Peer

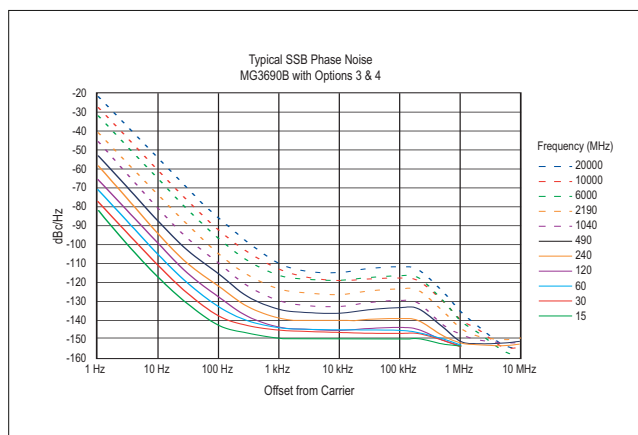

Phase Noise Performance typically only seen on narrow-band sources.

Anritsu synthesizers can truly provide a one-box solution for clean audio frequency, ultra-clean RF, and microwave signal generation, offering outstanding performance in applications that would have previously required a separate RF synthesizer. The phase noise plots included show the MG3690B's superb performance from 15 MHz to 20 GHz, with offsets from 1 Hz to 10 MHz. Another plot shows typical output power available up to 40 GHz. When it comes to clean broadband signals, the MG3690B eclipses the competition.

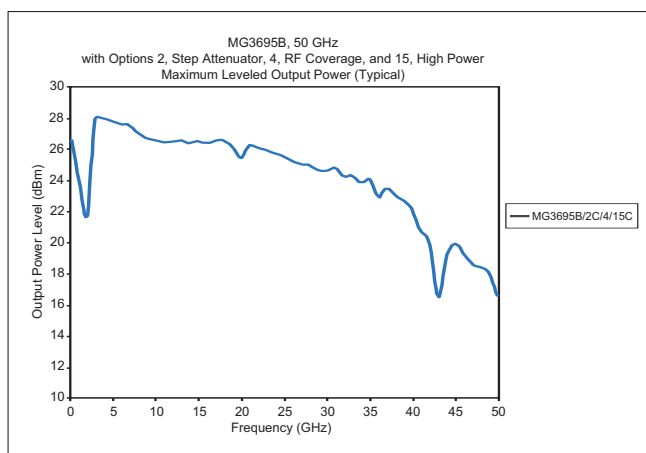

MG3690B available power

Ultra High Power at Microwave Frequencies

Utilizing state of the art MMIC devices, Anritsu Signal Generators deliver ultra-high power levels up to 20, 40, 50 GHz, and 67 GHz. With high power options, typical power levels of +26 dBm can be reached at 20 GHz, +21 dBm at 40 GHz, +16 dBm at 50 GHz, and +10 dBm at 67 GHz.

For high power solutions with excellent spectral purity, the standard unit offers a filtered output with +19 dBm typical output power at 20 GHz.

Ideal for the Manufacturing Environment

The MG3690B leverages the proven design of earlier Anritsu synthesizers, adding new features to meet the latest needs of the new millennium. The MG3690B builds on a proven reliability record of >49,000 hours MTBF. This allows the MG3690B to offer a standard 3-year warranty. From the sleek new lines of the front panel, the larger 1/4 VGA LCD, the reduced front panel buttons and menu depth, to the 10 kg lighter and 15 cm shallower depth, the MG3690B meets the new millennium value-based needs.




The Roos Instruments 7100A RFIC Tester with five Anritsu Synthesizers

Automatic Test Equipment

The MG3690B is an ideal signal generator for an A.T.E. system. It packs the highest performance available in a 13.3 cm (3u) package, with a 450 mm depth that minimizes rack space. High output power assures adequate signal strength to the device under test even after A.T.E. switching and cabling losses. Accurately leveled output power to -120 dBm in 0.01 dB steps facilitates receiver sensitivity measurements. For improved MTBF, an electronic step attenuator replaces the traditional mechanical step attenuator.

Fast 5 ms switching time maximizes system throughput. Internal list mode frees the A.T.E. controller to perform measurement analysis tasks. Free application drivers, including the IIVI-COM driver and National Instruments LabView® drivers, save you time and money in code generation and maintenance. For additional cost savings, Option 17 eliminates the complete front panel, including circuitry.

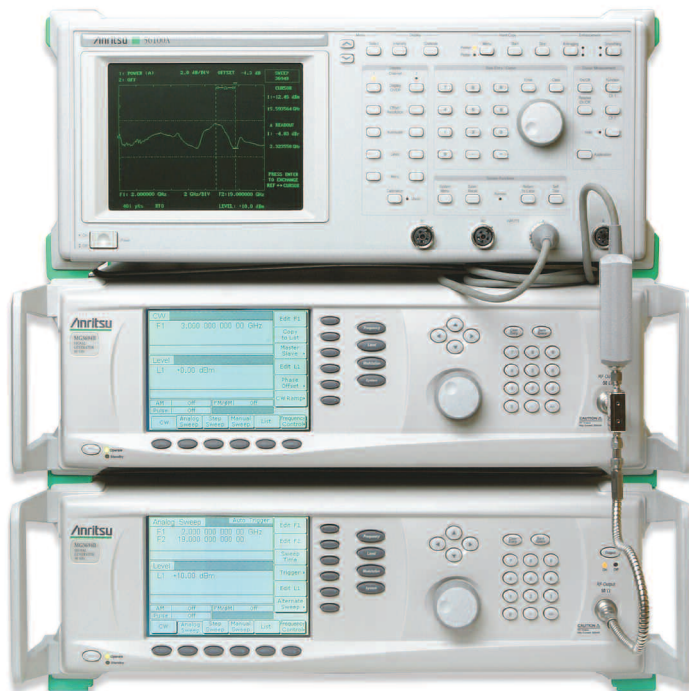

Two MG3690Bs used for frequency translated measurements, with a Scalar Network Analyzer.

New Technology Meets Field-Proven Testing Methodologies-SNA Measurements, Master Slave Measurements, and more...

How often are you faced with the task of simply updating an obsolete piece of test equipment, from a station that has met your needs for ages? Most often, replacing a signal generator with a newer model from even the same manufacturer involves at the least new test programs, and possibly even new testing methods.

Anritsu's MG3690B series is fully compatible with older model Anritsu synthesizers. Features necessary for Scalar Network Analyzer (SNA) measurements are still available as options. The MG3690B can be used as a source not only with the Anritsu 56100A series SNA, but is also compatible with Agilent's 8757D, and 8757E series SNAs.

For mixer measurements, the MG3690B series synthesizer still offers Master/Slave capability to drive a mixer's RF and LO at offset frequencies with two tracking synthesizers.

For TWTA measurements, the MG3690B offers external power meter leveling mode, which is the method used historically to drive these low source match amplifiers with a flat input power level.

RF/Microwave Signal Generators

MG3690B

RF/Microwave Signal Generator, 0.1 Hz to 70 GHz/325 GHz

Introduction

The MG3690B is the “ideal microwave signal generator” because it offers unsurpassed frequency coverage, leveled output power, spectral purity, switching speed, modulation performance, size, upgradeability, reliability, and service. Our signal generators are configurable for a broad range of applications from R&D to manufacturing and depot repair. Anritsu provides you a total solution including proven reliability and standard 3 year warranty plus pre- and post-sale support that is the best in the industry.



The Ideal Signal Generator

Specifications

The specifications in the following pages describe the warranted performance of the generator for $25 \pm 10^\circ\text{C}$. Typical specifications describe expected, but not warranted, performance based on sample testing.

Frequency Coverage

| Model/Option No. | Frequency Coverage | Output Type |
|------------------|--------------------|---------------------|
| MG3691B | 2 to 10 GHz | K(f) |
| MG3692B | 2 to 20 GHz | K(f) |
| MG3693B | 2 to 30 GHz | K(f) |
| MG3694B | 2 to 40 GHz | K(f) |
| MG3695B | 2 to 50 GHz | V(f) |
| MG3696B | 2 to 67 GHz* | V(f) |
| Option 4 | 10 MHz to 2.2 GHz | Model No. Dependent |
| Option 5 | 10 MHz to 2 GHz | Model No. Dependent |
| Option 22 | 0.1 Hz to 10 MHz | Model No. Dependent |

* Operational to 70 GHz

Options 4 and 5: Frequency extension down to 10 MHz

Two options are available to extend the 2 GHz low end frequency limit of the base models down to 10 MHz. Option 4 uses a digital down-converter (DDC) with successive divide-by-two circuitry. It offers the best phase noise performance of the two choices, at the expense of some analog performance <500 MHz. In that range, analog sweep mode is not available, and pulse modulation performance is specified as typical. In addition, frequency and phase modulation mod index is scaled by the division ratio of each band of the DDC. Option 5 maintains all analog performance by using a heterodyne mixing down-converter, but does not improve phase noise performance.

Option 22: Frequency extension down to DC

If frequency coverage down to 0.1 Hz is desired, Option 22 can be added with either Option 4 or 5. Option 22 uses Direct Digital Synthesis (DDS) for CW and Step Sweep modes of operation. Modulation and analog sweep are not available in the DDS band. Frequency resolution <10 MHz is 0.02 Hz. Output power across the complete instrument frequency range is degraded by 2 dB.

CW Mode

Output: Twenty independent, presettable CW frequencies (F0 – F9 and M0 – M9).

Accuracy: Same as internal or external 10 MHz time base.

Internal Time Base Stability:

With Aging: $<2 \times 10^{-9}/\text{day}$ ($<5 \times 10^{-10}/\text{day}$ with Option 16)

With Temperature: $<2 \times 10^{-9}/\text{deg C}$ over 0°C to 55°C ($<2 \times 10^{-10}/\text{deg C}$ with Option 16)

Resolution: 0.01 Hz

Internal Time Base Calibration: The internal time base can be calibrated via the System Cal menu to match an external reference (10 MHz ± 50 Hz).

External 10 MHz Reference Input: Accepts external 10 MHz ± 50 Hz (typical), 0 to +20 dBm time base signal. Automatically disconnects the internal high-stability time-base option, if installed. BNC, rear panel, 50 Ω impedance. Selectable Bandwidth for best phase noise immunity or best phase tracking performance.

10 MHz Reference Output: 1 Vp-p into 50 Ω , AC coupled.
Rear panel BNC; 50 Ω impedance.

Phase Offset: Adjustable in 0.1 degree steps.

Electronic Frequency Control (EFC) Input: -5V to +5V input range;
 5×10^{-7} Fout Hz/V sensitivity (typical); ≤ 250 Hz Modulation BW; Rear panel BNC;
High Impedance

Phase-Locked Step Sweep Mode

Sweep Width: Independently selected, 0.01 Hz to full range. Every frequency step in sweep range is phase-locked.

Accuracy: Same as internal or external 10 MHz time base.

Resolution (Minimum Step Size): 0.01 Hz

Linear/Log Sweep: User-selectable linear or log sweep.

In log sweep, step size logarithmically increases with frequency.

Steps: User-selectable number of steps or the step size.

Number of Steps: Variable from 1 to 10,000

Step Size: 0.01 Hz to the full frequency range of the instrument.
(If the step size does not divide into the selected frequency range, the last step is truncated.)

Dwell Time Per Step: Variable from 1 ms to 99 seconds

Fixed Rate Sweep: Allows the user to set the total time of the sweep, including lock time. Variable from 20 ms to 99 seconds.

Analog Sweep Mode (Option 6)

Sweep Width: Independently selected from 1 MHz to full frequency range. With Option 4, Digital Down Converter, Analog sweep is only available ≥ 500 MHz. Analog sweep is not available <10 MHz with Option 22.

Accuracy: The lesser of ± 30 MHz or (± 2 MHz + 0.25% of sweep width) for Sweep Speeds of ≤ 50 MHz/ms (typical)

Sweep Time Range: 30 ms to 99 seconds

Alternate Sweep Mode

Sweeps alternately in step sweep between any two sweep ranges. Each sweep range may be associated with a power level.

Manual Sweep Mode

Provides stepped, phase-locked adjustment of frequency between sweep limits. User-selectable number of steps or step size.

List Sweep Mode

Under GPIB control or via the front panel, up to 4 tables with 2000 non-sequential frequency/power sets can be stored and then addressed as a phase-locked step sweep. One table of 2000 points is stored in non-volatile memory, all other tables are stored in volatile memory.

Programmable Frequency Agility

Under GPIB control, up to 3202 non-sequential frequency/power sets can be stored and then addressed as a phase-locked step sweep. Data stored in volatile memory.

Markers

Up to 20 independent, settable markers (F0 – F9 and M0 – M9).

Video Markers: +5V or -5V marker output, selectable from system menus. AUX I/O connector, rear panel.

Intensity Markers: Produces an intensity dot on analog display traces, obtained by a momentary dwell in RF sweep, in analog sweeps of <1s.

Marker Accuracy: Same as sweep frequency accuracy.

Marker Resolution:

Analog Sweep: 1MHz or Sweep Width/4096 which ever is greater.

Step Sweep: 0.01 Hz.

Sweep Triggering

Sweep triggering is provided for Analog Frequency Sweep, Step Frequency Sweep, List Frequency Sweep, and CW Power Sweep.

Auto: Triggers sweep automatically.

External: Triggers a sweep on the low to high transition of an external TTL signal. AUX I/O connector, rear panel.

Single: Triggers, aborts, and resets a single sweep. Reset sweep may be selected to be at the top or bottom of the sweep.

General

Stored Setups: Stores front panel settings and nine additional front-panel setups in a non-volatile RAM. A system menu allows saving and recalling of instrument setups. Whenever the instrument is turned on, control settings come on at the same functions and values existing when the instrument was turned off.

Memory Sequencing Input: Accepts a TTL low-level signal to sequence through ten stored setups. AUX I/O connector, rear panel.

Self-Test: Instrument self-test is performed when Self-Test soft-key is selected. If an error is detected, an error message is displayed in a window on the LCD identifying the probable cause and remedy.

Secure Mode: Disables all frequency and power level state displays. Stored setups saved in secure mode remain secured when recalled. Mode selectable from a system menu and via GPIB.

Parameter Entry: Instrument-controlled parameters can be entered in three ways: keypad, rotary data knob, or the \wedge and \vee touch pads of the cursor-control key. The keypad is used to enter new parameter values; the rotary data knob and the cursor-control key are used to edit existing parameter values. The \wedge and \vee touch pads of the cursor-control key move the cursor left and right one digit under the open parameter. The rotary data knob or the \wedge and \vee touch pads will increment or decrement the digit position over the cursor. Controlled parameters are frequency, power level, sweep time, dwell time, and number of steps. Keypad entries are terminated by pressing the appropriate soft key. Edits are terminated by exiting the edit menu.

Reset: Returns all instrument parameters to predefined default states or values. Any pending GPIB I/O is aborted. Selectable from the system menu.

Master/Slave Operation: Allows two output signals to be swept with a user-selected frequency offset. One instrument controls the other via AUX I/O and SERIAL I/O connections. Requires a Master/Slave Interface Cable Set (Part No. ND36329).

User Level Flatness Correction: Allows user to calibrate out path loss due to external switching and cables via entered power table from a GPIB power meter or calculated data. When user level correction is activated, entered power levels are delivered at the point where calibration was performed. Supported power meters are Anritsu ML2437A, ML2438A, and ML4803A and HP 437B, 438A, and 70100A. Five user tables are available with up to 801 points/table.

Warm Up Time:

From Standby: 30 minutes.

From Cold Start (0 deg C): 120 hours to achieve specified frequency stability with aging. Instruments disconnected from AC line power for more than 72 hours require 30 days to return to specified frequency stability with aging.

Power: 85-264 Vac, 48-440 Hz, 250 VA maximum

Standby: With ac line power connected, unit is placed in standby when front panel power switch is released from the OPERATE position.

Weight: 18 kg maximum

Dimensions: 133 H x 429 W x 450 D mm

Warranty: 3 years from ship date

Remote Operation

All instrument functions, settings, and operating modes (except for power on/standby) are controllable using commands sent from an external computer via the GPIB (IEEE-488 interface bus).

GPIB Commands: Native, SCPI

GPIB Address: Selectable from a system menu

IEEE-488 Interface Function Subset:

Source Handshake: SH1

Acceptor Handshake: AH1

Talker: T6

Listener: L4

Service Request: SR1

Remote/Local: RL1

Parallel Poll: PP1

Device Clear: DC1

Device Trigger: DT1

Controller Capability: C0, C1, C2, C3, C28

Tri-State Driver: E2

GPIB Status Annunciators: When the instrument is operating in Remote, the GPIB status annunciators (listed below) will appear in a window on the front panel LCD.

Remote: Operating on the GPIB (all instrument front panel keys except for the SYSTEM key and the RETURN TO LOCAL soft-key will be ignored).

LLO (Local Lockout): Disables the RETURN TO LOCAL soft-key. Instrument can be placed in local mode only via GPIB or by cycling line power.

Emulations: The instrument responds to the published GPIB commands and responses of the Anritsu Models 6600, 6700, and 6XX00-series signal sources. When emulating another signal source, the instrument will be limited to the capabilities, mnemonics, and parameter resolutions of the emulated instrument.

Environmental (MIL-PRF-28800F, class 3)

Storage Temperature Range: -40 to +75 °C

Operating Temperature Range: 0 to +50 °C

Relative Humidity: 5% to 95% at 40 °C

Altitude: 4,600 meters, 43.9 cm Hg

EMI: Meets the emission and immunity requirements of
EN61326: 1998

EN55011: 1991/CISPR-11:1990 Group 1 Class A

EN61000-4-2: 1995 – 4 kV CD, 8 kV AD

EN61000-4-3: 1997 – 3 V/m

EN61000-4-4: 1995 – 0.5 kV SL, 1 kV PL

EN61000-4-5: 1995 – 1 kV – 2 kV L-E

EN61000-4-6: 1996

EN61000-4-11: 1994

Vibration: Random, 5-500 Hz, 0.015-0.0039g²/Hz PSD
Sinusoidal, 5-55 Hz, 0.33 mm displacement

Safety Directive: EN 61010-1: 1993 + A1: 92 + A2: 95


Frequency Switching Time

Definitions

Free Running Mode:

(Step or List Sweep)

t_{sw} = Switching Time, Unlocked

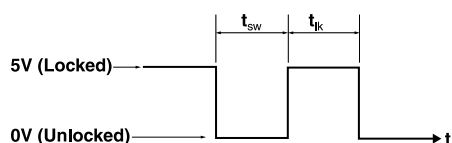

Lock Status Indicator
Rear Panel Aux I/O Connector (Pin 11)
(The lock status indicator goes high, when the output is within 1 kHz of the final frequency.)


t_{lk} = Locked Time = 1ms + t_{dw}

t_{dw} = Dwell Time, after locking. Selectable, 1 ms minimum

$t_{lk}(\text{min}) = 2 \text{ ms}$

Single Frequency Trigger Mode:

(List, non-sequential, and CFx modes)

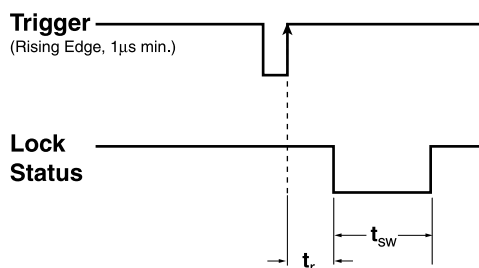

t_r = Trigger Response Time = 2 ms
(applies to both GPIB and External TTL triggers)

Switching Time (t_{sw})

| t_{sw}^* (ms) | Condition |
|---------------------------|--|
| 5 ms + 1 ms/GHz | step not starting at, or crossing dwell frequencies |
| 7 ms + 1 ms/GHz (typical) | step not starting at, or crossing band switching frequencies |
| 8 ms + 1 ms/GHz (typical) | step starting at, or crossing band switching frequencies |

Band Switching Dwell Frequencies: 2 (2.2 w/Opt. 4), 10, 20, 40 GHz

Filter Switching Dwell Frequencies: 3.3, 5.5, 8.4, 13.25, 25, 32 GHz

<2.2 GHz w/Opt. 4: 12.5, 15.625, 22.5, 31.25, 43.75, 62.5, 87.5, 125, 175, 250, 350, 500, 700, 1050, 1500 MHz

*Not applicable with FM mode active

Spectral Purity

All specifications apply at the lesser of +10 dBm output or maximum specified leveled output power, unless otherwise noted.

Spurious Signals

Harmonic and Harmonically-related:

| Frequency Range | Standard |
|--|------------|
| 0.1 Hz to 10 MHz (Option 22) | <-30 dBc |
| 10 MHz to ≤100 MHz (Option 4) | <-40 dBc |
| >100 MHz to ≤2.2 GHz (Option 4) | <-50 dBc |
| 10 MHz to ≤50 MHz (Option 5) | <-30 dBc |
| >50 MHz to <2 GHz (Option 5) | <-40 dBc |
| 2 GHz (>2.2 GHz w/Option 4) to ≤20 GHz | <-60 dBc* |
| >20 GHz to ≤40 GHz | <-40 dBc** |
| >40 GHz to ≤50 GHz (MG3695B) | <-40 dBc* |
| >40 GHz to ≤67 GHz (MG3696B) | <-25 dBc |

* -30 dBc typical with high power Option 15

† 20 GHz to 21 GHz and 39 - 40 GHz - 20 dBc typical (Option 15 only)

Non-harmonics:

| Frequency Range | Standard |
|--|----------|
| 0.1 Hz to 10 MHz (Option 22) | <-30 dBc |
| 10 MHz to ≤2.2 GHz (Option 4) | <-60 dBc |
| 10 MHz to ≤2 GHz (Option 5) | <-40 dBc |
| >2 GHz (2.2 GHz w/Option 4) to ≤67 GHz | <-60 dBc |

Power Line and Fan Rotation Spurious Emissions (dBc):

| Frequency | <300 Hz | Offset from Carrier | |
|-------------------------------|---------|---------------------|--------|
| | | 300 Hz to 1 kHz | >1 kHz |
| 10 to ≤500 MHz (Option 4) | <-68 | <-72 | <-72 |
| >500 to ≤1050 MHz (Option 4) | <-62 | <-72 | <-72 |
| >1050 to ≤2200 MHz (Option 4) | <-56 | <-66 | <-66 |
| 0.01 to ≤8.4 GHz | <-50 | <-60 | <-60 |
| >8.4 to ≤20 GHz | <-46 | <-56 | <-60 |
| >20 to ≤40 GHz | <-40 | <-50 | <-54 |
| >40 to ≤67 GHz | <-34 | <-44 | <-48 |

Residual FM* (CW and Step Sweep modes, 50 Hz - 15 kHz BW) (typical):

| Frequency Range | Residual FM (Hz RMS) | |
|-----------------|----------------------|----------|
| | Option 3 | Standard |
| ≤8.4 GHz | <40 | <120 |
| >8.4 to 20 GHz | <40 | <220 |
| >20 to ≤40 GHz | <80 | <440 |
| >40 to ≤67 GHz | <160 | <880 |

Residual FM* (Analog Sweep and Unlocked FM modes, 50 Hz - 15 kHz BW) (typical):

| Frequency Range | Residual FM (kHz RMS) | |
|--------------------|-------------------------|--|
| | Unlocked Narrow FM mode | Unlocked Wide FM mode or Analog Sweep (typ.) |
| 0.01 to ≤20 GHz | <10 | <25 |
| >20 GHz to ≤40 GHz | <20 | <50 |
| >40 GHz to ≤67 GHz | <40 | <100 |

*Residual FM is not applicable with FM locked mode

AM Noise Floor:

Typically <-145 dBm/Hz at 0 dBm output and offsets >5 MHz from carrier.

Single-Sideband Phase Noise*

Single-Sideband Phase Noise (dBc/Hz): (Typical)

| Frequency Range | Offset from Carrier | | | |
|---------------------------------|---------------------|-------------|-------------|-------------|
| | 100 Hz | 1 kHz | 10 kHz | 100 kHz |
| ≥0.1 Hz to <10 MHz (Option 22) | -90 (-110) | -120 (-125) | -130 (-139) | -130 (-141) |
| ≥10 MHz to <500 MHz (Option 4) | -94 (-98) | -106 (-115) | -104 (-114) | -120 (-127) |
| ≥500 MHz to <2.2 GHz (Option 4) | -82 (-90) | -94 (-102) | -92 (-100) | -108 (-117) |
| ≥10 MHz to <2 GHz (Option 5) | -77 (-85) | -88 (-92) | -85 (-91) | -100 (-108) |
| ≥2 GHz to ≤6 GHz | -77 (-79) | -88 (-92) | -86 (-90) | -102 (-112) |
| >6 GHz to ≤10 GHz | -73 (-78) | -86 (-91) | -83 (-90) | -102 (-107) |
| >10 GHz to ≤20 GHz | -66 (-72) | -78 (-84) | -77 (-83) | -100 (-104) |
| >20 GHz to ≤40 GHz | -60 (-66) | -75 (-78) | -72 (-77) | -94 (-98) |
| >40 GHz to ≤67 GHz | -54 (-60) | -69 (-72) | -64 (-71) | -88 (-92) |


Single-Sideband Phase Noise (dBc/Hz) – Option 30: (Typical)

| Frequency Range | Offset from Carrier | | | | | |
|---------------------------------|---------------------|------------|-------------|-------------|-------------|-------------|
| | 10 Hz | 100 Hz | 1 kHz | 10 kHz | 100 kHz | 1 MHz |
| ≥0.1 Hz to <10 MHz (Option 22) | -60 (-100) | -90 (-110) | -120 (-125) | -130 (-139) | -130 (-141) | -130 (-141) |
| ≥10 MHz to <500 MHz (Option 4) | -77 (-82) | -99 (-100) | -110 (-118) | -110 (-117) | -122 (-129) | -142 (-146) |
| ≥500 MHz to <2.2 GHz (Option 4) | -64 (-70) | -86 (-92) | -98 (-106) | -98 (-107) | -110 (-119) | -135 (-143) |
| ≥10 MHz to <2 GHz (Option 5) | -64 (-68) | -83 (-86) | -93 (-100) | -93 (-100) | -100 (-108) | -111 (-115) |
| ≥2 GHz to ≤6 GHz | -54 (-61) | -77 (-82) | -93 (-98) | -93 (-99) | -102 (-112) | -130 (-136) |
| >6 GHz to ≤10 GHz | -52 (-60) | -73 (-78) | -93 (-96) | -93 (-99) | -105 (-112) | -128 (-136) |
| >10 GHz to ≤20 GHz | -45 (-49) | -68 (-73) | -86 (-91) | -86 (-93) | -100 (-108) | -125 (-135) |
| >20 GHz to ≤40 GHz | -45 (-49) | -63 (-67) | -80 (-85) | -80 (-87) | -94 (-102) | -119 (-129) |
| >40 GHz to ≤67 GHz | -37 (-41) | -57 (-61) | -74 (-79) | -74 (-81) | -88 (-96) | -113 (-123) |

Single-Sideband Phase Noise (dBc/Hz) – Option 3: (Typical)

| Frequency Range | Offset from Carrier | | | | | |
|--------------------------------------|---------------------|-------------|-------------|-------------|-------------|-------------|
| | 10 Hz | 100 Hz | 1 kHz | 10 kHz | 100 kHz | 1 MHz |
| ≥0.1 Hz to <10 MHz (Option 22) | -60 (-100) | -90 (-110) | -120 (-125) | -130 (-139) | -130 (-141) | -130 (-141) |
| ≥10 MHz to ≤15.625 MHz (Option 4) | -105 (-118) | -126 (-133) | -139 (-145) | -142 (-148) | -141 (-148) | -145 (-149) |
| >15.625 MHz to ≤31.25 MHz (Option 4) | -99 (-114) | -120 (-127) | -134 (-144) | -137 (-147) | -137 (-147) | -145 (-150) |
| >31.25 MHz to ≤62.5 MHz (Option 4) | -90 (-111) | -114 (-121) | -129 (-143) | -136 (-146) | -136 (-146) | -144 (-152) |
| >62.5 MHz to ≤125 MHz (Option 4) | -88 (-98) | -108 (-116) | -127 (-130) | -135 (-143) | -133 (-143) | -144 (-148) |
| >125 MHz to ≤250 MHz (Option 4) | -84 (-90) | -102 (-110) | -125 (-129) | -132 (-137) | -130 (-135) | -143 (-147) |
| >250 MHz to ≤500 MHz (Option 4) | -77 (-83) | -99 (-103) | -123 (-128) | -125 (-131) | -124 (-129) | -142 (-146) |
| >500 MHz to ≤1050 MHz (Option 4) | -71 (-77) | -93 (-100) | -118 (-122) | -121 (-126) | -119 (-124) | -138 (-144) |
| >1050 MHz to ≤2200 MHz (Option 4) | -66 (-71) | -86 (-96) | -112 (-116) | -115 (-121) | -113 (-119) | -135 (-143) |
| ≥10 MHz to <2 GHz (Option 5) | -64 (-78) | -83 (-88) | -100 (-106) | -102 (-110) | -102 (-108) | -111 (-115) |
| ≥2 GHz to ≤6 GHz | -54 (-60) | -77 (-86) | -104 (-108) | -108 (-113) | -107 (-112) | -130 (-136) |
| >6 GHz to ≤10 GHz | -52 (-57) | -73 (-81) | -100 (-105) | -107 (-114) | -107 (-113) | -128 (-136) |
| >10 GHz to ≤20 GHz | -45 (-49) | -68 (-76) | -94 (-100) | -102 (-108) | -102 (-107) | -125 (-135) |
| >20 GHz to ≤40 GHz | -45 (-49) | -63 (-70) | -92 (-94) | -98 (-102) | -98 (-101) | -119 (-129) |
| >40 GHz to ≤67 GHz | -37 (-40) | -57 (-69) | -86 (-88) | -92 (-96) | -90 (-95) | -113 (-123) |

*Phase noise is specified and guaranteed only with internal reference. In External Reference mode, the phase noise of the external supplied reference, and the selected external reference bandwidth, will dictate the instrument phase noise performance. Phase noise is not degraded when adding high power Option 15.

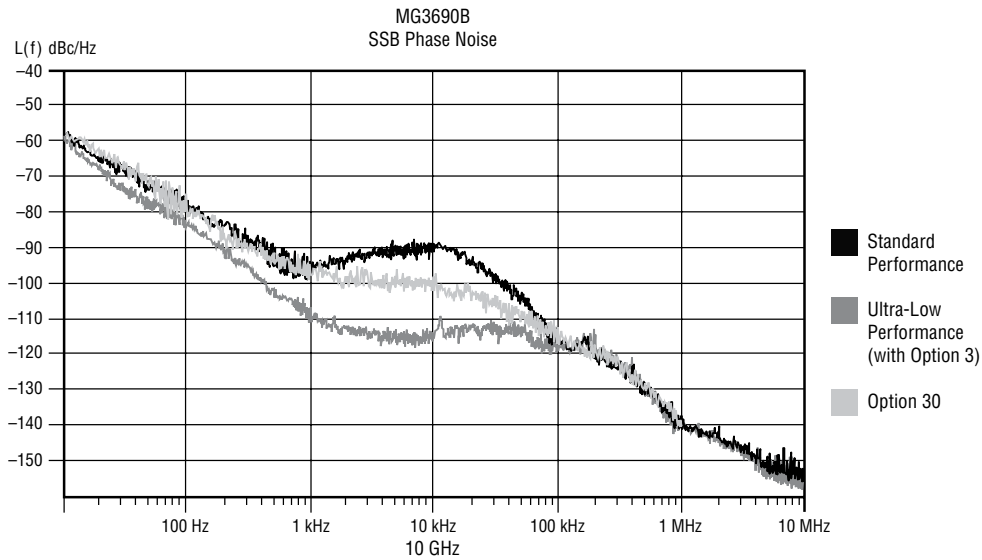

*Typical MG3690B single sideband phase noise at 10 GHz carrier.
Standard and Ultra-Low performance with Option 3.*

RF Output

Power level specifications apply at $25 \pm 10^\circ\text{C}$.

Maximum Levelled Output Power*:**

| Model Number | Configuration | Frequency Range (GHz) | Output Power (dBm) | Output Power With Step Attenuator (dBm) | Output Power With Electronic Step Attenuator (dBm) |
|--------------|-----------------------------------|---|---------------------------------|---|--|
| MG3691B | w/opt 4 or 5 STD | <2* GHz $\geq 2^{**}$ to ≤ 10 GHz | +19.0 +19.0 | +18.0 +18.0 | +15.0 +13.0 |
| MG3692B | w/opt 4 or 5 STD STD | <2* GHz $\geq 2^{**}$ to ≤ 10 GHz >10 to ≤ 20 GHz | +19.0 +19.0 +17.0 | +18.0 +18.0 +15.0 | Not Available |
| MG3693B | w/opt 4 or 5 STD STD STD | <2* GHz $\geq 2^{**}$ to ≤ 10 GHz >10 to ≤ 20 GHz >20 to ≤ 30 GHz | +15.0 +15.0 +12.0 +6.0 | +14.0 +14.0 +10.0 +3.0 | Not Available |
| MG3694B | w/opt 4 or 5 STD STD STD | <2* GHz $\geq 2^{**}$ to ≤ 10 GHz >10 to ≤ 20 GHz >20 to ≤ 40 GHz | +15.0 +15.0 +12.0 +6.0 | +14.0 +14.0 +10.0 +3.0 | Not Available |
| MG3695B | w/opt 4 or 5 STD STD | <2* GHz $\geq 2^{**}$ to ≤ 20 GHz >20 to ≤ 50 GHz | +12.0 +10.0 +3.0 | +10.0 +8.0 +0.0 | Not Available |
| MG3696B | w/opt 4 or 5 STD STD | <2* GHz $\geq 2^{**}$ to ≤ 20 GHz >20 to ≤ 67 GHz | +12.0 +10.0 +3.0 | +10.0 +8.0 +0.0**** | Not Available |

* ≤ 2.2 GHz with Option 4

** >2.2 GHz with Option 4

*** For output power with Option 22, 0.1 Hz to 10 MHz coverage, derate all specifications by 2 dB

**** Typical 60 to 67 GHz

Maximum Levelled Output Power With Option 15 (High Power) Installed*:**

| Model Number | Configuration | Frequency Range (GHz) | Output Power (dBm) | Output Power With Step Attenuator (dBm) | Output Power With Electronic Step Attenuator (dBm) |
|--------------|--|---|---|---|--|
| MG3691B | w/opt 4 or 5 w/opt 4 or 5 w/o opt 4 or 5 | <2* GHz ≥2** to ≤10 GHz ≥2 to ≤10 GHz | +19.0 +23.0 +25.0 | +18.0 +21.0 +23.0 | +15.0 +16.0 +16.0 |
| MG3692B | w/opt 4 or 5 w/opt 4 or 5 w/o opt 4 or 5 | <2* GHz ≥2** to ≤20 GHz ≥2 to ≤20 GHz | +19.0 +21.0 +23.0 | +18.0 +19.0 +21.0 | Not Available |
| MG3693B | w/opt 4 or 5 w/opt 4 or 5 w/opt 4 or 5 w/o opt 4 or 5 w/o opt 4 or 5 | <2* GHz ≥2** to ≤20 GHz >20 to ≤30 GHz ≥2 to ≤20 GHz >20 to ≤30 GHz | +17.0 +21.0 +17.0 +23.0 +19.0 | +16.0 +19.0 +15.0 +21.0 +17.0 | Not Available |
| MG3694B | w/opt 4 or 5 w/opt 4 or 5 w/opt 4 or 5 w/o opt 4 or 5 w/o opt 4 or 5 | <2* GHz ≥2** to ≤20 GHz >20 to ≤40 GHz ≥2 to ≤20 GHz >20 to ≤40 GHz | +17.0 +21.0 +17.0 +23.0 +19.0 | +16.0 +19.0 +15.0 +21.0 +17.0 | Not Available |
| MG3695B | w/opt 4 or 5 w/opt 4 or 5 w/opt 4 or 5 w/opt 4 or 5 w/o opt 4 or 5 w/o opt 4 or 5 w/o opt 4 or 5 | <2* GHz ≥2** to ≤20 GHz >20 to ≤40 GHz >40 to ≤50 GHz ≥2 to ≤20 GHz >20 to ≤40 GHz >40 to ≤50 GHz | +16 +21 +17 +11 +23 +19 +13 | +14 +19 +15 +8 +21 +17 +10 | Not Available |
| MG3696B | w/opt 4 or 5 w/opt 4 or 5 w/opt 4 or 5 w/opt 4 or 5 w/opt 4 or 5 w/o opt 4 or 5 w/o opt 4 or 5 w/o opt 4 or 5 w/o opt 4 or 5 | <2* GHz ≥2** to ≤20 GHz >20 to ≤40 GHz >40 to ≤67 GHz >67 to ≤70 GHz ≥2 to ≤20 GHz >20 to ≤40 GHz >40 to ≤67 GHz >67 to ≤70 GHz | +16 +19 +16 +9 +3***** +21 +19 +9 +3***** | +15 +18 +14 +6***** 0***** +19 +16 +6***** 0***** | Not Available |

* ≤2.2 GHz with Option 4

** >2.2 GHz with Option 4

*** For output power with Option 22, 0.1 Hz to 10 MHz coverage, derate all specifications by 2 dB

**** Typical 60 to 67 GHz

***** Typical

Minimum Levelled Output Power

Without an Attenuator: -5 dBm (-10 dBm typical)

With an Attenuator: -105 dBm (MG3691B, MG3692B, MG3693B, and MG3694B)
-95 dBm (MG3695B, and MG3696B)

With an Electronic Attenuator: -115 dBm (MG3691B)

Unlevelled Output Power Range (typical)

Without an Attenuator: >40 dB below max power.

With an Attenuator: >130 dB below max power.

Power Level Switching Time (to within specified accuracy)

Without Change in Step Attenuator: <3 ms typical

With Change in Step Attenuator: <20 ms typical

With Change in Electronic Step Attenuator: <3 ms typical. Power level changes across -70 dB step will result in 20 ms delay.

Step Attenuator (Option 2)

Adds a 10 dB/step attenuator, with 110 dB range on models ≤40 GHz, and 90 dB range on models >40 GHz. Option 2E adds an electronic version with 120 dB range, only available on an MG3691B. Option 2E is not available on units with Option 22, coverage down to 0.1 Hz.

Accuracy and Flatness

Accuracy specifies the total worst case accuracy. Flatness is included within the accuracy specification.

Step Sweep and CW Modes:


| Attenuation Below Max Power | Frequency (GHz) | | | |
|-----------------------------------|-----------------|----------|----------|---------|
| | ≤40** | 40-50 | 50-60 | 60-67 |
| Accuracy: | | | | |
| 0-25 dB | ±1.0 dB | ±1.5 dB | ±1.5 dB | ±1.5 dB |
| 25-60 dB | ±1.0 dB | ±1.5 dB | ±3.5 dB* | N/A |
| 60-100 dB | ±1.0 dB | ±2.5 dB* | ±3.5 dB* | N/A |
| Flatness: | | | | |
| 0-25 dB | ±0.8 dB | ±1.1 dB | ±1.1 dB | ±1.1 dB |
| 25-60 dB | ±0.8 dB | ±1.1 dB | ±3.1 dB* | N/A |
| 60-100 dB | ±0.8 dB | ±2.1 dB* | ±3.1 dB* | N/A |

*Typical


**Accuracy and Flatness with high power Option 15, is ±1.5 dB. It is also ±1.5 dB below 20 MHz, with or without Option 15.

Analog Sweep Mode (typical):

| Attenuation Below Max Power | Frequency (GHz) | | | |
|-----------------------------------|-----------------|---------|---------|---------|
| | 0.01-0.05 | 0.05-20 | 20-40 | 40-67 |
| Accuracy: | | | | |
| 0-12 dB | ±2.0 dB | ±2.0 dB | ±2.0 dB | ±3.0 dB |
| 12-30 dB | ±3.5 dB | ±3.5 dB | ±4.6 dB | ±5.6 dB |
| 30-60 dB | ±4.0 dB | ±4.0 dB | ±5.2 dB | ±6.2 dB |
| 60-122 dB | ±5.0 dB | ±5.0 dB | ±6.2 dB | ±7.2 dB |
| Flatness: | | | | |
| 0-12 dB | ±2.0 dB | ±2.0 dB | ±2.0 dB | ±2.5 dB |
| 12-30 dB | ±3.5 dB | ±3.5 dB | ±4.1 dB | ±5.1 dB |
| 30-60 dB | ±4.0 dB | ±4.0 dB | ±4.6 dB | ±5.6 dB |
| 60-122 dB | ±5.0 dB | ±5.0 dB | ±5.2 dB | ±6.2 dB |

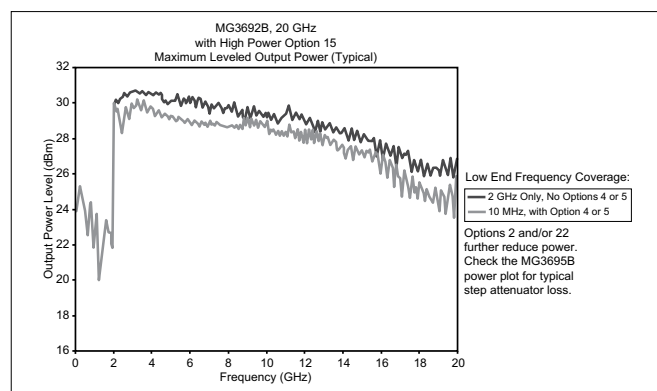

Typical MG3692B maximum available output power

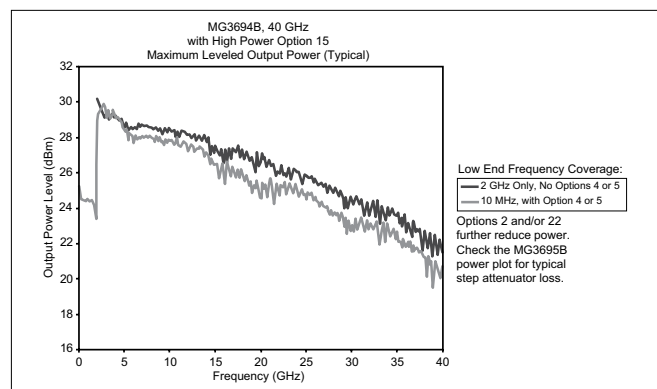

Typical MG3694B maximum available output power

Other Output Power Specifications

Output Units: Output units selectable as either dBm or mV. Selection of mV assumes 50Ω load. All data entry and display are in the selected units.

Output Power Resolution: 0.01 dB or 0.001 mV

Source Impedance: 50Ω nominal

Source SWR (Internal Leveling): <2.0 typical

Power Level Stability with Temperature: 0.04 dB/deg C typical

Level Offset: Offsets the displayed power level to establish a new reference level.

Output On/Off: Toggles the RF output between an Off and On state. During the Off state, the RF oscillator is turned off. The On or Off state is indicated by two LEDs located below the OUTPUT ON/OFF key on the front panel.

RF On/Off Between Frequency Steps: System menu selection of RF On or RF Off during frequency switching in CW, Step Sweep, and List Sweep modes.

RF On/Off During Retrace: System menu selection of RF On or RF Off during retrace.

Internal Leveling: Power is leveled at the output connector in all modes.

External Leveling:

External Detector: Levels output power at a remote detector location. Accepts a positive or negative 0.5 mV to 500 mV input signal from the remote detector. L1 adjusts the input signal range to an optimum value. BNC connector, rear panel.

External Power Meter: Levels output power at a remote power meter location. Accepts a ±1V full scale input signal from the remote power meter. L1 adjusts the input signal range to an optimum value. BNC connector, rear panel.

External Leveling Bandwidth: 30 kHz typical in Detector mode. 0.7 Hz typical in Power Meter mode.

User Level Flatness Correction:

Number of points: 2 to 801 points per table

Number of tables: 5 available

Entry modes: GPIB power meter or computed data

CW Power Sweep

Range: Sweeps between any two power levels at a single CW frequency.
Resolution: 0.01 dB/step (Log) or 0.001 mV (Linear)

Accuracy: Same as CW power accuracy.

Log/Linear Sweep: Power sweep selectable as either log or linear. Log sweep is in dB; linear sweep is in mV.

Step Size: User-controlled, 0.01 dB (Log) or 0.001 mV (Linear) to the full power range of the instrument.

Step Dwell Time: Variable from 1 ms to 99 seconds. If the sweep crosses a step attenuator setting, there will be a sweep dwell of approximately 20 ms to allow setting of the step attenuator.

Sweep Frequency/Step Power

A power level step occurs after each frequency sweep. Power level remains constant for the length of time required to complete each sweep.

Internal Power Monitor (Option 8)

Sensors: Compatible with Anritsu 560-7, 5400-71, or 6400-71 series detectors. Rear panel input.

Range: +16 dBm to -35 dBm

Accuracy: ±1 dBm, (+16 to -10 dBm)
±2 dBm, (-10 to -35 dBm)

Resolution: 0.1 dBm minimum

Modulation

Frequency/Phase Modulation (Option 12)

Option 12 adds frequency and phase modulation, driven externally via a rear panel BNC connector, 50Ω. For internal modulation, add Internal LF Generator and Pulse Generator Option 27. Frequency/Phase Modulation is not available <10 MHz with Option 22.

For the most accurate FM and ΦM measurements, Bessel Null methods are used. When verifying FM and ΦM, the use of the "carrier null" technique is recommended. Measured residual FM effects must be subtracted from modulation meter measurements.

Frequency Generator Multiplication/Division Ratios:

| Frequency Range | Divide Ratio, n |
|----------------------------------|--------------------------|
| <10 MHz (Option 22) | modulation not available |
| ≥10 to ≤15.625 MHz (Option 4) | 256 |
| >15.625 to ≤31.25 MHz (Option 4) | 128 |
| >31.25 to ≤62.5 MHz (Option 4) | 64 |
| >62.5 to ≤125 MHz (Option 4) | 32 |
| >125 to ≤250 MHz (Option 4) | 16 |
| >250 to ≤500 MHz (Option 4) | 8 |
| >500 to ≤1050 MHz (Option 4) | 4 |
| >1050 to ≤2200 MHz (Option 4) | 2 |
| >10 to ≤2000 MHz (Option 5) | 1 |
| >2 to ≤20 GHz | 1 |
| >20 to ≤40 GHz | 1/2 |
| >40 to ≤67 GHz | 1/4 |

Frequency Modulation:

| Parameter | Modes | Conditions | Specifications | Conditions | Specifications |
|----------------------|---|---|--|---|--|
| | | for all Frequencies other than <2.2 GHz with Option 4 | | for Frequencies <2.2 GHz with Option 4 | |
| Deviation | Locked | Rate= 1 kHz to 8 MHz | ± [Lesser of 10 MHz or 300 * (mod rate)]/n | Rate = 1 kHz to (Lesser of 8 MHz or 0.03 * Fcarrier) | ±[Lesser of 10 MHz or 300 * (mod rate)]/n |
| | Locked Low-noise | Rate= 50 kHz to 8 MHz | ±[Lesser of 10 MHz or 3 * (mod rate)]/n | Rate = 50 kHz to (Lesser of 8 MHz or 0.03 * Fcarrier) | ±[Lesser of 10 MHz or 3 * (mod rate)]/n |
| | Unlocked Narrow | Rate= DC to 8 MHz | ±10 MHz/n | Rate = DC to (Lesser of 8 MHz or 0.03 * Fcarrier) | ±(10 MHz)/n |
| | Unlocked Wide | Rate= DC to 100 Hz | ±100 MHz/n | Rate = DC to 100 Hz | ±(100 MHz)/n |
| Bandwidth (3 dB) | Locked | | 1 kHz to 10 MHz | | 1 kHz to (Lesser of 10 MHz or 0.03 * Fcarrier) |
| | Locked Low-noise | | 30 kHz to 10 MHz | | 30 kHz to (Lesser of 8 MHz or 0.03 * Fcarrier) |
| | Unlocked Narrow | | DC to 10 MHz | | DC to (Lesser of 10 MHz or 0.03 * Fcarrier) |
| | Unlocked Wide | | DC to 100 Hz | | DC to 100 Hz |
| Flatness | Locked | Rate= 10 kHz to 1 MHz | ±1 dB relative to 100 kHz | Rate = 10 kHz to (Lesser of 1 MHz or 0.01 * Fcarrier) | ±1 dB relative to 100 kHz |
| Accuracy | Locked and Low-noise Unlocked Narrow | Rate= 100 kHz sinewave Int. or 1 Vpk Ext. | 10% (5% typical) | Rate= 100 kHz sinewave Int. or 1 Vpk Ext. | 10% (5% typical) |
| Incidental AM | Locked and Low-noise Unlocked Narrow | 1 MHz Rate, ±1 MHz Dev. | <2% typical | Rate and Dev.= Lesser of 1 MHz or 0.01 * Fcarrier | <2% typical |
| Harmonic Distortion | Locked | 10 MHz Rate, ±1 MHz Dev. | <1% | Rate = 10 kHz, Dev.= ±(1 MHz)/n | <1% |
| External Sensitivity | Locked | (±1V maximum input) | ±(10 kHz/V to 20 MHz/V)/n | (±1Vpk maximum input) | ±(10 kHz/V to 20 MHz/V)/n |
| | Locked Low-noise | | " | | " |
| | Unlocked Narrow | | " | | " |
| | Unlocked Wide | | ±(100 kHz/V to 100 MHz/V)/n | | ±(100 kHz/V to 100 MHz/V)/n |

Phase Modulation:

| Parameter | Modes | Conditions | Specifications | Conditions | Specifications |
|----------------------|-----------------|---|---|---|---|
| | | for all Frequencies other than <2.2 GHz with Option 4 | | for Frequencies <2.2 GHz with Option 4 | |
| Deviation | Narrow | Rate= DC to 8 MHz | ± [Lesser of 3 rad or (5 MHz/mod rate)]/n | Rate = DC to (Lesser of 8 MHz or 0.03 * Fcarrier) | ±[Lesser of 3 rad or (5 MHz/mod rate)]/n |
| | Wide | Rate= DC to 1 MHz | ±[Lesser of 400 rad or (10 MHz/mod rate)]/n | Rate = DC to (Lesser of 1 MHz or 0.03 * Fcarrier) | ±[Lesser of 400 rad or (10 MHz/mod rate)]/n |
| Bandwidth (3 dB) | Narrow | | DC to 10 MHz | | DC to (Lesser of 10 MHz or 0.03 * Fcarrier) |
| | Wide | | DC to 1 MHz | | DC to (Lesser of 1 MHz or 0.03 * Fcarrier) |
| Flatness | Narrow | Rate= DC to 1 MHz | ±1 dB relative to 100 kHz | Rate = DC to (Lesser of 1 MHz or 0.01 * Fcarrier) | ±1 dB relative to 100 kHz rate |
| | Wide | Rate= DC to 500 kHz | ±1 dB relative to 100 kHz | Rate = DC to (Lesser of 500 kHz or 0.01 * Fcarrier) | ±1 dB relative to 100 kHz rate |
| Accuracy | Narrow and Wide | 100 kHz Internal or 1Vpk External, sine | 10% | 100 kHz Internal or 1Vpk External, sine | 10% |
| External Sensitivity | Narrow | (±1V maximum input) | ±(0.0025 rad/V to 5 rad/V)/n | (±1Vpk maximum input) | ±(0.0025 rad/V to 5 rad/V)/n |
| | Wide | | ±(0.25 rad/V to 500 rad/V)/n | | ±(0.25 rad/V to 500 rad/V)/n |

Amplitude Modulation (Option 14)

Option 14 adds amplitude modulation, driven externally via a rear panel BNC connector 50 Ω . For internal modulation, add Internal LF and Pulse Generators Option 27.

All amplitude modulation specifications apply at 50% depth, 1 kHz rate, with RF level set 6 dB below maximum specified leveled output power, unless otherwise noted. Amplitude Modulation is not available <10 MHz with Option 22.

AM Depth (typical): 0-90% linear; 20 dB log

AM Bandwidth (3 dB):

DC to 50 kHz minimum

DC to 100 kHz typical

Flatness (DC to 10 kHz rates): ± 0.3 dB

Accuracy: Reading $\pm 5\%$

Distortion: <5% typical

Incidental Phase Modulation (30% depth, 10 kHz rate):

<0.2 radians typical

External AM Input: Log AM or Linear AM input, rear-panel BNC, 50 Ω input impedance. For internal modulation, add LF Generator Option 27.

Sensitivity:

Log AM: Continuously variable from 0 dB per volt to 25 dB per volt.

Linear AM: Continuously variable from 0% per volt to 100% per volt.

Maximum Input: ± 1 Vpk

Pulse Modulation (Option 26)

Option 26 adds pulse modulation, driven externally via a rear panel BNC connector, TTL. For internal modulation, add Internal LF and Pulse Generators Option 27.

Pulse modulation specifications apply at maximum rated power, unless otherwise noted. Pulse modulation is not available <10 MHz with Option 22.

On/Off Ratio: >80 dB (>70 dB with high power Option 15)

Minimum Leveled Pulse Width:

100 ns, ≥ 1 GHz

1 μ s, <1 GHz

Minimum Unleveled Pulse Width: <10 ns

Level Accuracy Relative to CW (100 Hz to 1 MHz PRF):

± 0.5 dB, ≥ 1 μ s pulse width

± 1.0 dB, <1 μ s pulse width

Pulse Delay (typical): 50 ns in External Mode

PRF Range:

DC to 10 MHz, unleveled

100 Hz to 5 MHz, leveled

| Frequency Range | Rise and Fall Time (10% to 90%) | Overshoot | Pulse Width Compression | Video Feedthrough |
|-----------------------------------|---------------------------------|-----------|-------------------------|-------------------|
| ≥ 10 to <31.25 MHz (Opt. 4) | 400 ns* | 33%* | 40 ns* | ± 70 mV* |
| ≥ 31.25 to <125 MHz (Opt. 4) | 90 ns* | 22%* | 12 ns* | ± 130 mV* |
| ≥ 125 to <500 MHz (Opt. 4) | 33 ns* | 11%* | 12 ns* | ± 70 mV* |
| ≥ 500 to <2200 MHz (Opt. 4) | 15 ns* | 10% | 12 ns* | ± 50 mV* |
| ≥ 10 to <1000 MHz (Opt. 5) | 15 ns, 10 ns* | 10% | 8 ns* | ± 30 mV* |
| ≥ 1 to <2 GHz (Opt. 5) | 10 ns, 5 ns* | 10% | 8 ns* | ± 30 mV* |
| ≥ 2 to 67 GHz* | 10 ns, 5 ns* | 10%* | 8 ns* | ± 30 mV* |

External Input: Rear-panel BNC. For internal modulation, add Pulse Generator Option 27

Drive Level: TTL compatible input

Input Logic: Positive-true or negative-true, selectable from modulation menu.

Internal LF and Pulse Generators (Option 27)

An internal pulse generator and two internal waveform generators are added, one providing a frequency or phase modulating signal and the other an amplitude modulating signal. This Internal LF and Pulse Generators option can only be ordered in combination with either FM/ Φ M, AM, or Pulse options, 12, 14, and 26 respectively.

Waveforms: Sinusoid, square-wave, triangle, positive ramp, negative ramp, Gaussian noise, uniform noise. (Check Option 10 for User-Defined)

Rate:

0.1 Hz to 10 MHz sinusoidal

0.1 Hz to 1 MHz square-wave, triangle, ramps

Resolution: 0.1 Hz

Accuracy: Same as instrument timebase ± 0.014 Hz

Waveform Outputs: Two BNC connectors on the rear panel, FM/ Φ M OUT and AM OUT

Pulse Modes: Singlet, doublet, triplet, quadruplet

Pulse Triggers: Free-run, triggered, gated, delayed, triggered with delay, swept-delay

Pulse Inputs/Outputs: Video pulse and sync out, rear-panel BNC connectors

| Pulse Parameter | Selectable Clock Rate | |
|-----------------|-----------------------|----------------------|
| | Narrow (100 MHz) | Wide (10 MHz) |
| Pulse Width | 10 ns to 160 ms | 100 ns to 1.6 s |
| Pulse Period* | 100 ns to 160 ms | 600 ns to 1.6 s |
| Variable Delay | | |
| Singlet | 0 to 160 ms | 0 to 1.6 s |
| Doublet | 100 ns to 160 ms | 300 ns to 1.6 s |
| Triplet | 100 ns to 160 ms | 300 ns to 1.6 s |
| Quadruplet | 100 ns to 160 ms | 300 ns to 1.6 s |
| Resolution | 10 ns | 100 ns |
| Accuracy | 10 ns (5 ns typical) | 10 ns (5 ns typical) |

① For 50 and 67 GHz units, overshoot >40 GHz is 20% typical at rated power.

② Period must be longer than the sum of delay and width by 5 clock cycles minimum.

③ Rise time and Pulse Width Compression, >20 GHz, degrades by 2 ns, with High Power Option 15.

* Typical

IF Up-Conversion (Option 7)

Option 7 adds an internal mixer that can be used for the generic up-conversion of an IF signal. The mixer's RF, LO, and IF ports are made available at the rear panel of the MG3690B, via three female K-Connectors. The typical application will feed the MG3690B microwave output, which can be moved to the rear panel via option 9K, to the mixer's LO port. An external IF signal will be fed to the mixer's IF port. The new up-converted signal will be available at the mixer's RF port.

| | |
|------------------------------|-----------------|
| Mixer Type | Double Balanced |
| RF, LO Range | 1 to 40 GHz |
| IF Range | DC to 700 MHz |
| Conversion Loss | 10 dB Typical |
| Max Power into any Port | 30 dBm |
| Isolation, RF to LO | 23 dB |
| LO Drive Level (recommended) | +10 to +13 dBm |
| Input P _{1dB} | +3 dBm Typical |


The IF Up-Conversion option is particularly useful to create a microwave frequency IQ-modulated signal. Lower frequency IQ-modulated RF sources are readily available, such as the Anritsu MG3681A. Option 7's IF input can be used to feed in an IQ-modulated signal from an MG3681A, up-converting it to as high as 40 GHz with an MG3694B. A typical setup is shown below.

User-Defined Modulation Waveform Software (Option 10)

An external software package provides the ability to download user-defined waveforms into the internal LF Generator's (Option 27) memory. The MG3690B provides as standard with the LF Generator sinusoidal, square-wave, triangle, positive ramp, Gaussian noise, and uniform noise waveforms.

Two look-up tables of 65,536 points can be used to generate two pseudo-random waveforms, one for amplitude modulation and the other for frequency or phase modulation. The download files are simple space-delimited text files containing integer numbers between 0 and 4095, where 0 corresponds to the minimum modulation level and 4095 the maximum.

In addition to the capability of downloading custom waveforms, the software offers a virtual instrument modulation panel. Custom modulation setups with user waveforms can be stored for future use. For IFF signal simulation, the internal generators can be synchronized. They can also be disconnected from the internal modulators, making the low frequency waveforms available at the rear panel for external purposes.

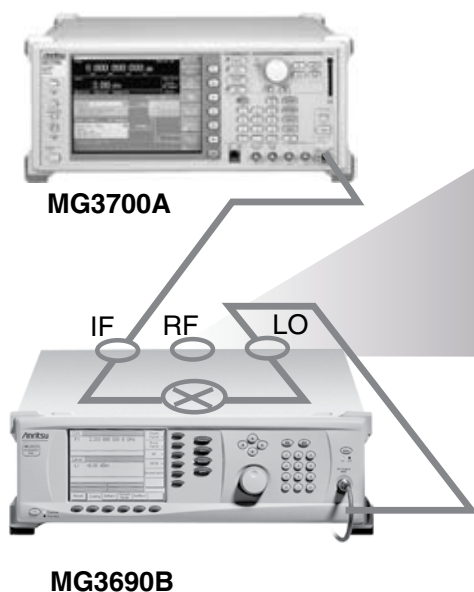


Scan Modulation (Option 20)

Option 20 adds a microwave linearly controlled attenuator to provide deep AM capability. This modulator is inserted outside the leveling loop but before the optional step attenuator. It is switched in and out of the RF path. Scan modulation is driven externally only.

One application of this feature is storing an antenna pattern wave form in memory and using it to feed the external input to the scan modulator, Option 20.

| | |
|----------------------|---|
| Frequency Range | 2 to 18 GHz |
| Attenuation Range | 0 to 60 dB |
| Flatness/Accuracy | ± 1.5 dB/ ± 1.5 dB, 0 to 40 dB ± 3 dB/ ± 2 dB, 40 to 60 dB |
| Step Response | < 1 μ s |
| Sensitivity | -10 dB/V |
| Modulation Bandwidth | 20 kHz (small signal) 5 kHz (large signal) |
| Insertion Loss | < 6 dB (when engaged) |
| Input | Rear Panel BNC connector High Impedance |

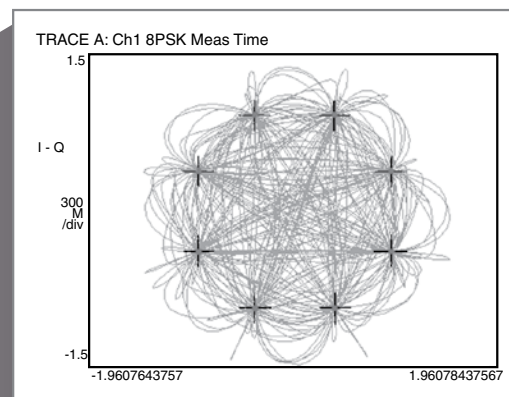

Carrier Frequency = 38.000 GHz

IF Up-Conversion (Option 7) Application and Setup

mmW Frequency Coverage


Millimeter Wave Multipliers¹ - 63850 series (Option 18 recommended for DC bias.)

63850 series external, waveguide output, multipliers are available for banded frequency coverage up to 325 GHz.

These external multipliers require at a minimum an MG3692B, with 20 GHz coverage. The output power required to drive the modules is +10 dBm. They can be powered up by an external power supply (+12Vdc, 1.5A typ.) using the supplied double banana power cord. It is recommended to purchase an MG3690B with option 18, which adds the capability to bias these modules without the need of an additional power supply. It adds a rear panel Twinax connector that supplies the proper DC bias for these modules, and a cable to power them up. Option 18 is not available with options 7 and 15.

63850 series multipliers have a saturated, unlevelled, output power, yet their inherent flatness is exceptional. Modulating the input drive will indeed modulate the output, except for the case of Amplitude Modulation. Since the output is saturated, Amplitude Modulation is not recommended with these mmW modules. Frequency and Phase Modulation is possible, but the achieved deviation will be multiplied based on the multiplication factor of the module. Pulse modulation is also possible, with even sharper rise and fall times than the input. All modulation performances are not specified.

For ease of operation, the MG3690B allows the user to enter a frequency scaling factor, the module's multiplication factor, which will be used only for purposes of displaying the proper frequency at the output of the mmW module, on the MG3690B's front panel display.

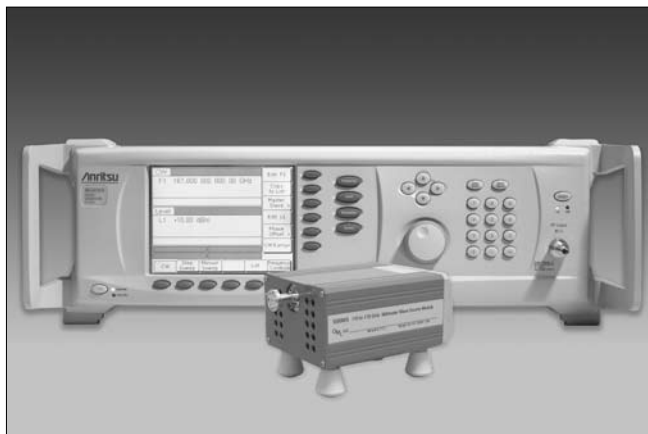

MG3690B with 63850 Series Millimeter Wave Multiplier

| Multiplier p/n ¹ | 63850-15 | 63850-12 | 63850-10 | 63850-08 | 63850-06 | 63850-05 | 63850-03 |
|--|---|---------------|---------------|---------------|--------------|----------------------|----------------------|
| Frequency | 50-75 GHz | 60-90 GHz | 75-110 GHz | 90-140 GHz | 110-170 GHz | 140-220 GHz | 220-325 GHz |
| Waveguide Output | WR-15 | WR-12 | WR-10 | WR-08 | WR-06 | WR-05 | WR-03 |
| Flange ² | (008) | (009) | (010) | (M08) | (M06) | (M05) | (M03) |
| Output Power (typical) | +8 dBm | +6 dBm | +5 dBm | -5 dBm | -13 dBm | -15 dBm ³ | -25 dBm ⁴ |
| Output Flatness (typical) (Unlevelled) | ±2 dB | ±2 dB | ±3 dB | — | — | — | — |
| Output Match | >12 dB | >12 dB | >12 dB | >12 dB | >12 dB | >12 dB | 6 dB (typical) |
| Multiplication Factor (m) | x4 | x6 | x6 | x8 | x12 | x12 | x18 |
| Input Frequency | 12.5-18.75 GHz | 10.0-15.0 GHz | 12.5-18.4 GHz | 11.2-17.5 GHz | 9.1-14.2 GHz | 11.6-18.4 GHz | 12.2-18.1 GHz |
| Frequency Accuracy | (LO Synthesizer's Accuracy x m) | | | | | | |
| Frequency Resolution | (LO Synthesizer's Resolution x m) | | | | | | |
| Harmonics & Spurious | -15 dBc (typical) | | | | | | |
| Input Power Required | +10 dBm | | | | | | |
| RF Input Connector | SMA (female) | | | | | | |
| DC Power | 12 Vdc, 1.5A (double banana power cord included) Option 18 is recommended on the synthesizer, to supply the necessary bias. | | | | | | |
| Dimensions | 120 mm x 110 mm x 70 mm (not including feet or interfaces) | | | | | | |
| Weight | <1 kg | | | | | | |
| Temperature | +20 °C to +30 °C | | | | | | |

¹ These mmW modules are produced by OML Inc. (Oleson Microwave Labs), co-located in Morgan Hill, CA., with mutual collaborative experiences over many years.

For detailed and up-to-date specifications, please call OML, Inc. or visit their website at www.oml-mmwave.com.

² Waveguide output flanges are per MIL-F-3922/67B-(xxx)

³ Power rolls off from -15 dBm at 200 GHz, to -25 dBm typical at 220 GHz.

⁴ Output power is estimated.

Inputs and Outputs

| Input/Output Connectors | | |
|------------------------------|--|---|
| Nomenclature | Type** | Location |
| EXT ALC IN | BNC | Rear Panel |
| RF OUTPUT* (Option 9) | Connector (female) fmax ≤40 GHz V Connector (female) fmax ≥40 GHz | Standard-Front Panel Option 9-Rear Panel |
| 10 MHz REF IN | BNC | Rear Panel |
| 10 MHz REF OUT | BNC | Rear Panel |
| HORIZ OUT | BNC | Rear Panel |
| EFC IN | BNC | Rear Panel |
| AUX I/O | 25 pin D-type | Rear Panel |
| SERIAL I/O | RJ45 | Rear Panel |
| IEEE-488 GPIB | Type 57 | Rear Panel |
| mmW/BIAS* (Option 18) | Twinax | Rear Panel |
| RF, LO, IF* (Option 7) | K Connector (female) 3x | Rear Panel |
| PULSE TRIG IN (Option 26) | BNC | Rear Panel |
| PULSE SYNC OUT (Option 27) | BNC | Rear Panel |
| PULSE VIDEO OUT (Option 27) | BNC | Rear Panel |
| AM IN (Option 14) | BNC | Rear Panel |
| FM/ΦM IN (Option 12) | BNC | Rear Panel |
| AM OUT (Option 27) | BNC | Rear Panel |
| FM/FM OUT (Option 27) | BNC | Rear Panel |
| SCAN MOD IN* (Option 20) | BNC | Rear Panel |
| POWER MONITOR IN* (Option 8) | Custom | Rear Panel |


*Options (7 & 18), (7 & 20), (8 & 9) are mutually exclusive, as they share the same rear panel space.

**Connectors may be available but not active, if option is not ordered.



MG3690B Rear Panel

| | | | |
|--|---|----------------------------------|--|
| EXT ALC IN | Provides for leveling the RF output signal externally with either a detector or power meter. Signal requirements are shown in the RF Output specifications. | IEEE-488 GPIB | Provides input/output connections for the General Purpose Interface Bus (GPIB). |
| RF OUTPUT | Provides for RF output from 50 Ω source impedance. K Connector, female. Option 9 moves the RF Output connector to the rear panel. | mmW BIAS | Provides the bias for the external waveguide multipliers for coverage up to 325 GHz. |
| 10 MHz REF IN | Accepts an external 10 MHz ± 100 Hz, 0 to +20 dBm time-base signal. Automatically disconnects the internal high-stability time-base option, if installed. 50 Ω impedance. | RF, LO, IF | Provides access to an internal IF up-conversion mixer, Option 7. |
| 10 MHz REF OUT | Provides a 1Vp-p, AC coupled, 10 MHz signal derived from the internal frequency standard. 50 Ω impedance. | PULSE TRIG IN | Accepts an external TTL compatible signal to pulse modulate the RF output signal or to trigger or to gate the optional internal pulse generator. Available with Option 26, Pulse Modulation. |
| HORIZ OUT (Horizontal Sweep Output) | Provides 0V at beginning and +10V at end of sweep, regardless of sweep width. In CW mode, the voltage is proportional to frequency between 0V at low end and +10V at the high end of range. In CW mode, if CW RAMP is enabled, a repetitive, 0V to +10V ramp is provided. | PULSE SYNC OUT | Provides a TTL compatible signal, synchronized to the internal pulse modulation output, Option 27. |
| EFC IN | Provides the capability to frequency modulate the internal crystal oscillator, allowing phase locking the synthesizer inside an external lock loop. Specifications on page 2. | PULSE VIDEO OUT | Provides a video modulating signal from the internal pulse generator, Option 27. |
| AUX I/O (Auxiliary Input/Output) | Provides for most of the rear panel BNC connections through a single, 25-pin, D type connector. Supports master-slave operation with another synthesizer or allows for a single-cable interface with the Model 56100A Scalar Network Analyzer and other Anritsu instruments. (see figure below) | AM IN | Accepts an external signal to amplitude modulate the RF output signal, Option 14. 50 Ω impedance. |
| SERIAL I/O (Serial Input/Output) | Provides access to RS-232 terminal ports to support service and calibration functions and master-slave operations. | FM/ΦM IN | Accepts an external signal to frequency or phase modulate the RF output signal, Option 12. 50 Ω impedance. |
| | | AM OUT | Provides the amplitude modulation waveform from the internal LF generator, Option 27. |
| | | FM/ΦM OUT | Provides the frequency or phase modulation waveform from the internal LF generator, Option 27. |
| | | SCAN MOD IN | Accepts an external signal to scan modulate the RF output signal, Option 20. High Impedance. |
| | | POWER MONITOR IN | Accepts an external detector for power monitoring, Option 8. |

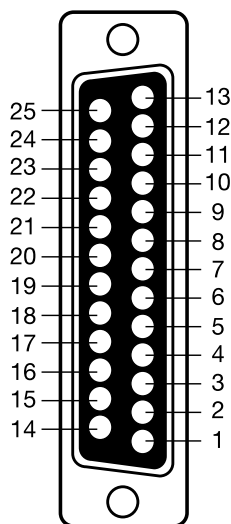

25-pin, D type connector

Aux I/O pins:

- | | |
|--------------------------------|-----------------------------------|
| 1. Horizontal Output | 14. V/GHz Output |
| 2. Chassis Ground | 15. End-of-Sweep Input |
| 3. Sequential Sync Output | 16. End-of-Sweep Output |
| 4. Low Alternate Enable Output | 17. - |
| 5. Marker Output | 18. Sweep Dwell Input |
| 6. Retrace Blanking Output | 19. - |
| 7. Low Alternate Sweep Output | 20. Bandswitch Blanking Output |
| 8. Chassis Ground | 21. Master Reset |
| 9. - | 22. Horizontal Sweep Input |
| 10. Sweep Dwell Output | 23. Horizontal Sweep Input Return |
| 11. Lock Status Output | 24. Chassis Ground |
| 12. Penlift | 25. Memory Sequencing Input |
| 13. External Trigger Input | |

Ordering Information

Models

| | |
|---------|---|
| MG3691B | 2 – 10 GHz Signal Generator |
| MG3692B | 2 – 20 GHz Signal Generator |
| MG3693B | 2 – 30 GHz Signal Generator |
| MG3694B | 2 – 40 GHz Signal Generator |
| MG3695B | 2 – 50 GHz Signal Generator |
| MG3696B | 2 – 67 GHz Signal Generator (operational to 70 GHz) |

Options and Accessories

| | |
|-------------|---|
| MG3690B/1A | Rack Mount with slides – Rack mount kit containing a set of track slides (90 degree tilt capability), mounting ears, and front panel handles to let the instrument be mounted in a standard 19-inch equipment rack. |
| MG3690B/1B | Rack Mount without slides – Modifies rack mounting hardware to install unit in a console that has mounting shelves. Includes mounting ears and front panel handles. |
| MG3690B/2X | Mechanical Step Attenuator – Adds a 10 dB/step attenuator. Rated RF output power is reduced. (This option comes in different versions, based on instrument configuration.) |
| MG3690B/2E | Electronic Step Attenuator – Adds a 10 dB/step electronic attenuator with a 120 dB range for the MG3691B. Rated RF output power is reduced. (Not available with Option 20 or 22.) |
| MG3690B/3 | Ultra Low Phase Noise, main band – Adds new modules to significantly reduce SSB phase noise. (Not available with Option 30.) |
| MG3690B/4 | 10 MHz to 2.2 GHz RF coverage, Ultra-Low Phase Noise version – Uses a digital down converter to significantly reduce SSB phase noise. |
| MG3690B/5 | 10 MHz to 2 GHz RF coverage – Uses an analog down converter. |
| MG3690B/6 | Analog Sweep Capability – (limited to ≥500 MHz when used with Option 4.) |
| MG3690B/7 | IF Up-Conversion – Adds an internal 40 GHz mixer for up-converting an IF signal. (Not available with MG3695B, MG3696B, or with Options 18 or 20.) |
| MG3690B/8 | Power Monitor – Adds internal power measurement capability. (Not available with Option 9.) |
| MG3690B/9X | Rear Panel Output – Moves the RF output connector to the rear panel. (This option comes in different versions, based on instrument configuration.) (Not available with Option 8.) |
| MG3690B/10 | User-Defined Modulation Waveform Software – External software package provides the ability to download user-defined waveforms into the memory of the internal waveform generator, serially or via GPIB. External PC and an instrument with LF Generator, Option 27, are required. |
| MG3690B/12 | Frequency and Phase Modulation – External, via a rear panel BNC connector. For internal modulation capability, requires additionally LF Generator, Option 27. |
| MG3690B/14 | Amplitude Modulation – External, via a rear panel BNC connector. For internal modulation capability, requires additionally LF Generator, Option 27. |
| MG3690B/15X | High Power – Adds high-power RF components to the instrument to increase its output power level. (This option comes in different versions, based on instrument configuration.) |
| MG3690B/16 | High Stability Time Base – Adds an ovenized, 10 MHz crystal oscillator as a high-stability time base. |
| MG3690B/17 | Delete Front Panel – Deletes the front panel for use in remote control applications where a front panel display and keyboard control are not needed. (Only available with Options 1A or 1B) |
| MG3690B/18 | mmW Bias Output – Adds a rear panel BNC Twinax connector required to bias the 63850 series millimeter wave source modules, sold separately. Includes DC bias cable. (Not available with Option 7 or 15x) |

| | | | |
|--------------|---|-----------------|------------------|
| MG3690B/20 | Scan Modulation – Adds an internal Scan modulator for simulating high-depth amplitude modulated signals. Requires an external modulating signal input capability. (Not available on models MG3693B, MG3694B, MG3695B, MG3696B, or with Options 2E, 7, 15X, or 22.) | | |
| MG3690B/22 | 0.1 Hz to 10 MHz Audio coverage – Uses a DDS for coverage down to approximately DC. When adding Option 22, the output power is derated by 2 dB. The frequency resolution below 10 MHz is 0.02 Hz. No modulation is available in the 0.1 Hz to 10 MHz band. (Not available without Option 4 or 5, or with Option 20 or 2E) | | |
| MG3690B/26X | Pulse Modulation – External, via a rear panel BNC connector. For internal modulation capability, requires additionally Pulse Generator, Option 27. (This option comes in different versions, based on instrument configuration.) | | |
| MG3690B/27 | Internal LF and Pulse Generators – Provides modulation waveforms for internal AM, FM, FM, and Pulse. (Not available without Option 12, 14, or 26.) | | |
| MG3690B/28X* | Analog Modulation Suite – For ease of ordering and package pricing, this option bundles Options 12, 14, 26 and 27, offering internal and external AM, FM, FM, and Pulse Modulation. (This option comes in different versions, based on instrument configuration.) | | |
| MG3690B/30 | Low Phase Noise. (Not available with Option 3.) | | |
| MG3690B/37A | Performance Suite – For ease of ordering and package pricing, this option bundles Options 2A, 5 and 28A, offering 10 MHz to 20 GHz frequency range, Step Attenuator and Analog Modulation Suite. | | |
| MG3690B/38A | Ultra Performance Suite – For ease of ordering and package pricing, this option bundles Options 2A, 3, 4, 15A, 22 and 28A, offering 0.1 Hz to 20 GHz frequency range, Step Attenuator, Ultra Low Phase Noise, High Power and Analog Modulation Suite. | | |
| MG3690B/39X | CW Power Meter and Sensor Bundle – This bundle adds an ML2437A Power Meter with no options and an appropriate power sensor to the Synthesizer order. | | |
| | Option | Sensor | Available with |
| | 39A | MA2472D, 18 GHz | MG3691B |
| | 39B | MA2473D, 32 GHz | MG3692B, MG3693B |
| | 39C | MA2474D, 40 GHz | MG3694B |
| | 39D | MA2475D, 50 GHz | MG3695B, MG3696B |
| MG3690B/40 | Pulse Power Meter and Sensor Bundle – This bundle adds an ML2495A Pulse Power Meter and MA2411B Pulse Power Sensor for models MG3691B, MG3692B, MG3693B, and MG3694B. | | |

Millimeter Wave Accessories

(Option 18 recommended for DC bias)

| | |
|----------|---|
| 63850-15 | 50-75 GHz V band Multiplier Source Module, WR-15 |
| 63850-12 | 60-90 GHz E band Multiplier Source Module, WR-12 |
| 63850-10 | 75-110 GHz W band Multiplier Source Module, WR-10 |
| 63850-08 | 90-140 GHz F band Multiplier Source Module, WR-08 |
| 63850-06 | 110-170 GHz D band Multiplier Source Module, WR-06 |
| 63850-05 | 140-220 GHz G band Multiplier Source Module, WR-05 |
| 63850-03 | 220-325 GHz H band Multiplier Source Module, WR-03 |
| 806-121 | SMA male-male flexible cable, 90 cm (3 ft) (could be used to connect the MG3690B output to the module's LO input) |

Accessories

| | |
|----------|---|
| 34RKNF50 | DC to 20 GHz, Ruggedized Type N female adapter for units with a K connector output |
| ND36329 | MASTER/SLAVE interface cable set |
| 63270 | Transit case (16 kg, 66 cm x 41 cm x 81 cm, roll-away on four wheels) |
| 2300-469 | IVI Driver, includes LabView® driver |
| 806-97 | Aux I/O Cable, 25 pin to BNC: Provides BNC access to Aux I/O Data Lines: Sequential Sync, Marker Out, Bandswitch Blanking, Retrace Blanking, Sweep Dwell In, V/GHz, Horizontal Out. |

Upgrades

Economical upgrades are available to upgrade any model to any higher performing model. Consult Anritsu for details.

MG3690B OPTION CONFIGURATION GUIDE – Important: Please see footnotes where applicable

| MODELS | OPTIONS | | | | | | | | | | | | | | | | |
|---------|---------|----|-------|----|----|-----------|---------|--------|--------|-------|-----------|--------|--------|--------|--------|--------|--------|
| | OPT 1 | | OPT 2 | | | | OPT 3 | OPT 4 | OPT 5 | OPT 6 | OPT 7 | OPT 8 | OPT 9 | | OPT 10 | OPT 12 | OPT 14 |
| | 1A | 1B | 2A | 2B | 2C | 2E | | | | | | | 9K | 9V | | | |
| MG3691B | ● | ● | ● | | | ● 9,11 | ● 13 | ● 1 | ● 1 | ● | ● 2,12 | ● 8 | ● 8 | | ● 3 | ● | ● |
| MG3692B | ● | ● | ● | | | | ● 13 | ● 1 | ● 1 | ● | ● 2,12 | ● 8 | ● 8 | | ● 3 | ● | ● |
| MG3693B | ● | ● | | ● | | | ● 13 | ● 1 | ● 1 | ● | ● 2,12 | ● 8 | ● 8 | | ● 3 | ● | ● |
| MG3694B | ● | ● | | ● | | | ● 13 | ● 1 | ● 1 | ● | ● 2,12 | ● 8 | ● 8 | | ● 3 | ● | ● |
| MG3695B | ● | ● | | | ● | | ● 13 | ● 1 | ● 1 | ● | | ● 8 | | ● 8 | ● 3 | ● | ● |
| MG3696B | ● | ● | | | ● | | ● 13 | ● 1 | ● 1 | ● | | ● 8 | | ● 8 | ● 3 | ● | ● |

| MODELS | OPTIONS | | | | | | | | | | | | | | | | | | |
|---------|---------|---------|---------|---------|--------|---------|-----------|--------|-----------|--------|-----|--------|--------|--------|---------|---------|---------|--------|--------|
| | OPT 15 | | | | OPT 16 | OPT 17 | OPT 18 | OPT 20 | OPT 22 | OPT 26 | | OPT 27 | OPT 28 | | OPT 30 | OPT 37A | OPT 38A | OPT 98 | OPT 99 |
| | 15A | 15B | 15C | 15D | | | | | | 26A | 26B | | 28A | 28B | | | | | |
| MG3691B | ● 12 | | | | ● | ● 10 | ● 2,12 | ● 9 | ● 5,11 | ● | | ● 6 | ● 7 | | ● 13 | | | ● | ● |
| MG3692B | ● 12 | | | | ● | ● 10 | ● 2,12 | ● 9 | ● 5 | ● | | ● 6 | ● 7 | | ● 13 | ● 14 | ● 15 | ● | ● |
| MG3693B | | ● 12 | | | ● | ● 10 | ● 2,12 | | ● 5 | ● | | ● 6 | ● 7 | | ● 13 | | | ● | ● |
| MG3694B | | ● 12 | | | ● | ● 10 | ● 2,12 | | ● 5 | | ● | ● 6 | | ● 7 | ● 13 | | | ● | ● |
| MG3695B | | | ● 12 | | ● | ● 10 | ● 12 | | ● 5 | | ● | ● 6 | | ● 7 | ● 13 | | | ● | ● |
| MG3696B | | | | ● 12 | ● | ● 10 | ● | | ● 5 | | ● | ● 6 | | ● 7 | ● 13 | | | ● | ● |

Footnote 1 Options 4 and 5 MAY NOT be ordered together

Footnote 2 Options 7 and 18 MAY NOT be ordered together
Options 7 and 20 MAY NOT be ordered together

Footnote 3 Option 10 MAY ONLY be ordered with either Options 27 or 28

Footnote 5 Option 22 MAY ONLY be ordered with either Options 4 or 5
Option 22 MAY NOT be ordered with Option 20

Footnote 6 Option 27 MAY ONLY be ordered with either Options 12, 14 or 26
(in any combination)

Footnote 7 Option 28 MAY NOT be ordered along with either Options 12, 14, 26, or 27

Footnote 8 Option 8 MAY NOT be ordered along with Option 9

Footnote 9 Option 20 MAY NOT be ordered with Option 2E, Option 7, Option 15
or Option 22

Footnote 10 Option 17 MAY ONLY be ordered with either Option 1A or 1B

Footnote 11 Option 2E MAY NOT be ordered with Option 22

Footnote 12 Option 18 MAY NOT be ordered with Option 15 or 7
Option 15 MAY NOT be ordered with Option 20

Footnote 13 Option 3 and 30 MAY NOT be ordered together

Footnote 14 Option 37 MAY ONLY be ordered with new MG3692B units and may not be
retrofitted. Not available with Option 4, 12, 14, 26 or 27.

Footnote 15 Option 38 MAY ONLY be ordered with new MG3692B units and may not be
retrofitted. Not available with Option 5, 12, 14, 20, 26, 27 or 30.

Option Descriptions

| | |
|-----------------|--|
| Opt 1: | Rack Mount kits |
| Opt 2: | Step Attenuators |
| Opt 3: | Ultra Low Phase Noise |
| Opt 4: | RF Coverage, with DDC |
| Opt 5: | RF Coverage, with analog down conv. |
| Opt 6: | Analog Sweep Capability |
| Opt 7: | IF Up-Conversion |
| Opt 8: | Power Monitor |
| Opt 9: | Rear Panel RF Output |
| Opt 10: | User-defined Modulation Waveform Software |
| Opt 12: | External FM/PM modulation |
| Opt 14: | External AM modulation |
| Opt 15: | High Power output |
| Opt 16: | High Stability Time Base |
| Opt 17: | Delete front panel |
| Opt 18: | Mmw bias output |
| Opt 20: | Scan Modulation |
| Opt 22: | Audio Frequency coverage |
| Opt 26A: | Pulse modulation - For MG3691B, MG3692B, MG3693B |
| Opt 26B: | Pulse modulation - For MG3694B, MG3695B, MG3696B |
| Opt 27: | Internal LF and Pulse generators |
| Opt 28A: | Full Modulation Suite (opt 12,14,26A,27) for MG3691B, MG3692B, MG3693B |
| Opt 28B: | Full Modulation Suite (opt 12,14,26B,27) for MG3694B, MG3695B, MG3696B |
| Opt 30: | Low Phase Noise |
| Opt 37A: | Performance Suite (opt 2A, 5, 28A) for MG3692B |
| Opt 38A: | Ultra Performance Suite (opt 2A, 3, 4, 15A, 22, 28A) for MG3692B |
| Opt 39X: | CW Power Meter and Sensor Bundle |
| Opt 40: | Pulse Power Meter and Sensor Bundle |
| Opt 98: | Standard calibration to ISO 17025 and ANSI/NCSL Z540 |
| Opt 99: | Premium calibration to ISO 17025 and ANSI/NCSL Z540. Test report and uncertainty data included. |



Anritsu Corporation

5-1-1 Onna, Atsugi-shi, Kanagawa, 243-8555 Japan
Phone: +81-46-223-1111
Fax: +81-46-296-1264

• U.S.A.

Anritsu Company

1155 East Collins Boulevard, Suite 100,
Richardson, Texas 75081 U.S.A.
Toll Free: 1-800-ANRITSU (267-4878)
Phone: +1-972-644-1777
Fax: +1-972-671-1877

• Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletrônica Ltda.

Praca Amadeu Amaral, 27-1 Andar
01327-010 - Paraiso, São Paulo, Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3886940

• Mexico

Anritsu Company, S.A. de C.V.
Av. Ejército Nacional No. 579 Piso 9, Col. Granada
11520 México, D.F., México
Phone: +52-55-1101-2370
Fax: +52-55-5254-3147

• U.K.

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• France

Anritsu S.A.

16/18 Avenue du Québec-SILIC 720
91961 COURTABOEUF CEDEX, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49 (0) 89 442308-0
Fax: +49 (0) 89 442308-55

• Italy

Anritsu S.p.A.

Via Elio Vittorini, 129, 00144 Roma, Italy
Phone: +39-06-509-9711
Fax: +39-06-502-2425

• Sweden

Anritsu AB

Borgafjordsgatan 13, 164 40 KISTA, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

• Finland

Anritsu AB

Teknobulevardi 3-5, FI-01530 VANTAA, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu A/S

Kirkebjerg Allé 90 DK-2605 Brøndby, Denmark
Phone: +45-72112200
Fax: +45-72112210

• Spain

Anritsu EMEA Ltd.

Oficina de Representación en España

Edificio Veganova
Avda de la Vega, nº 1 (edf 8, pl1, of 8)
28108 ALCOBENDAS - Madrid, Spain
Phone: +34-914905761
Fax: +34-914905762

• Russia

Anritsu EMEA Ltd.

Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor.
Russia, 125009, Moscow
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• United Arab Emirates

Anritsu EMEA Ltd.

Dubai Liaison Office

P O Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suite 701, 7th Floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

• Singapore

Anritsu Pte. Ltd.

60 Alexandra Terrace, #02-08, The Comtech (Lobby A)
Singapore 118502
Phone: +65-6282-2400
Fax: +65-6282-2533

• India

Anritsu Pte. Ltd.

India Liaison Office

3rd Floor, Shri Lakshminarayan Niwas, #2726
HAL 3rd Stage, Bangalore - 560 038, India
Phone: +91-80-4058-1300
Fax: +91-80-4058-1301

• P. R. China (Hong Kong)

Anritsu Company Ltd.

Units 4 & 5, 28th Floor, Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• P. R. China (Beijing)

Anritsu Company Ltd.

Beijing Representative Office

Room 1515, Beijing Fortune Building,
No. 5, Dong-San-Huan Bei Road,
Chao-Yang District, Beijing 100004, P.R. China
Phone: +86-10-6590-9230
Fax: +82-10-6590-9235

• Korea

Anritsu Corporation, Ltd.

8F Hyunjuk Bldg. 832-41, Yeoksam-Dong,
Kangnam-ku, Seoul, 135-080, Korea
Phone: +82-2-553-6603
Fax: +82-2-553-6604

• Australia

Anritsu Pty Ltd.

Unit 21/270 Ferntree Gully Road, Notting Hill
Victoria, 3168, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihsu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

